

## BFV DRUM-HEATERS

Heating blankets for drums of 25, 50, 100 and 200 L



Catalogue

Standard drum-heaters from 25 to 200 L



## Index

### Standard heaters for drums

Heating bands and blankets -----	Pg 3
Heating blankets schemes -----	Pg 4
General characteristics -----	Pg 5

### Drums of 25 litres

<b>BFV845150200:</b> (845 x 150 mm - 200 W) -----	Pgs 6, 7
<b>BFV1020400250:</b> (1.024 x 400 mm - 250 W) -----	Pgs 8, 9
<b>BFV1020400450:</b> (1.024 x 400 mm - 450 W) -----	Pgs 10, 11

### Drums of 50 litres

<b>BFV1005150300:</b> (1.005 x 150 mm - 300 W) -----	Pgs 12, 13
<b>BFV1250150350:</b> (1.250 x 150 mm - 350 W) -----	Pgs 14, 15
<b>BFV1250450275:</b> (1.250 x 450 mm - 275 W) -----	Pgs 16, 17
<b>BFV1250450625:</b> (1.250 x 450 mm - 625 W) -----	Pgs 18, 19

### Drums of 100 litres

<b>BFV1385150750:</b> (1.385 x 150 mm - 750 W) -----	Pgs 20, 21
<b>BFV1650350575:</b> (1.650 x 350 mm - 575 W) -----	Pgs 22, 23
<b>BFV1650350750:</b> (1.650 x 350 mm - 750 W) -----	Pgs 24, 25

### Drums of 200 litres

<b>BFV17704501000:</b> (1.770 x 450 mm - 1.000 W) -----	Pgs 26, 27
<b>BFV19504501000:</b> (1.950 x 450 mm - 1.000 W) -----	Pgs 28, 29
<b>BFV1950850900:</b> (1.950 x 850 mm - 900 W) -----	Pgs 30, 31
<b>BFV19508501500:</b> (1.950 x 850 mm - 1.500 W) -----	Pgs 32, 33
<b>BFV19508502300:</b> (1.950 x 850 mm - 2.300 W) -----	Pgs 34, 35
<b>BFV17709001500:</b> (1.770 x 900 mm - 1.500 W) -----	Pgs 36, 37

### Heating blankets request

Heating blankets request on demand -----	Pg 38
--	-------

### BFV range

Our other heating blankets -----	Pg 39
----------------------------------	-------

## Drum-heaters

### Heating blankets BFV

Range of standard drum-heaters specially designed for heating by surface, providing the right temperature for the stored product.  
Maximum temperature 90 ° C.

### Application


The main function of these heating blankets is to avoid and compensate for the heat losses that certain fluids suffer during the production process.

It is essential that the fluid or product stored in the drum does not freeze and / or transform its viscosity or any of its characteristics, also preventing these changes from affecting the container.

# BFV




## Heating blankets scheme

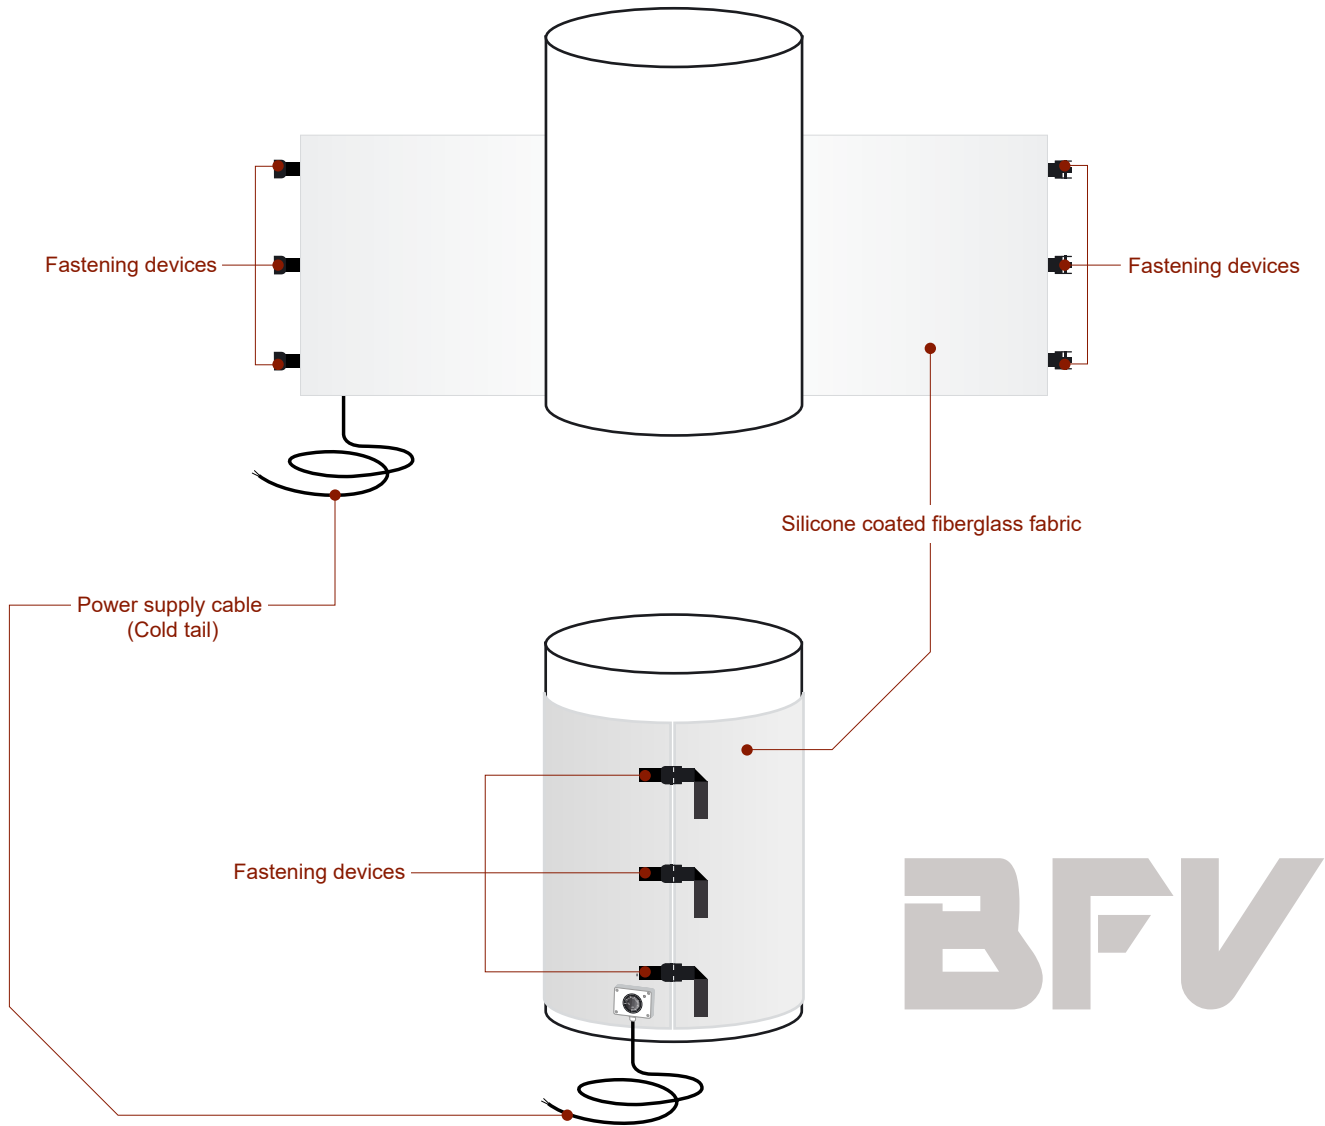

## General characteristics


• **Fabric**

Silicone coated fiberglass



• **Fastening device**

Nylon straps with plastic buckles



• **Label**

Technical characteristics and CE marking



• **AT056**

Analog thermostat 0-90° C included as standard



• **Power cable**

Connecting cable to mains




# BFV

## Drum-heaters for 25 L drums

**BFV845150200:** Drum-heater for 25 litres drums

- Suitable for metal drums and drums made of fiberglass, polyester, polyethylene, etc.

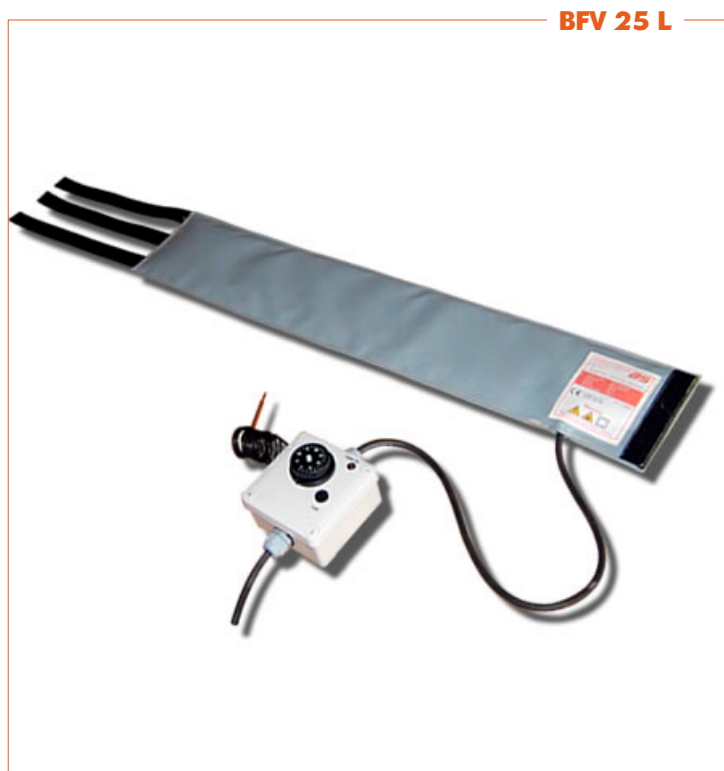

Model	25 Litres
Reference	BFV845150200
Length	845 mm
Width	150 mm
Power (W)	200 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Velcro

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat



Model	Description
<b>AT056</b>	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz</li> <li>• Maximum load current: 3 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Bulb and capillary sensing - 1 metre</li> </ul>

## Technical characteristics

<b>Model:</b>	<b>BFV845150200</b>
<b>Application areas:</b>	Heating and temperature control for drums of 25 L
<b>Power delivery at 230 V - 50 Hz:</b>	200 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	845 x 150 x 14 mm
<b>Type of fastener device:</b>	Velcro
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 1 mm <sup>2</sup> H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 25-30 L drums

**BFV1020400250:** Drum-heaters for 25 - 30 litres drums

- Suitable for plastic drums: fiberglass, polyester, polyethylene, etc.

**BFV 25 - 30 L**



Model	25 - 30 Litres
Reference	BFV1020400250
Length	1.020 mm
Width	400 mm
Power (W)	250 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon belts with plastick buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat

**AT056**



Model	Description
<b>AT056</b>	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz</li> <li>• Maximum load current: 3 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Built-in the heater</li> </ul>



## Technical characteristics

<b>Model:</b>	<b>BFV1020400250</b>
<b>Application areas:</b>	Heating and temperature control for drums of 25-30 L
<b>Power delivery at 230 V - 50 Hz:</b>	250 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.020 x 400 x 14 mm
<b>Type of fastener device:</b>	Nylon belts with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 1 mm <sup>2</sup> H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 25-30 L drums

**BFV1020400450:** Drum-heaters for 25 - 30 litres drums

- Suitable for plastic drums: fiberglass, polyester, polyethylene, etc.

**BFV 25 - 30 L**



Model	25 - 30 Litres
Reference	BFV1020400450
Length	1.020 mm
Width	400 mm
Power (W)	450 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon belts with plastick buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat

**AT056**



Model	Description
<b>AT056</b>	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz</li> <li>• Maximum load current: 3 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Built-in the heater</li> </ul>

## Technical characteristics

<b>Model:</b>	<b>BFV1020400450</b>
<b>Application areas:</b>	Heating and temperature control for drums of 25-30 L
<b>Power delivery at 230 V - 50 Hz:</b>	450 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.020 x 400 x 14 mm
<b>Type of fastener device:</b>	Nylon belts with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 1 mm <sup>2</sup> H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 50 L drums

**BFV1005150300:** Drum-heater for 50 litres drum

- Suitable for metal drums and drums made of fiberglass, polyester, polyethylene, etc.

**BFV 25 L**



Model	50 Litres
Reference	BFV1005150300
Length	1.005 mm
Width	150 mm
Power (W)	300 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Velcro

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat

**AT056**



Model	Description
<b>AT056</b>	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz</li> <li>• Maximum load current: 3 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Bulb and capillary sensing - 1 metre</li> </ul>

## Technical characteristics

<b>Model:</b>	<b>BFV1005150300</b>
<b>Application areas:</b>	Heating and temperature control for drums of 50 L
<b>Power delivery at 230 V - 50 Hz:</b>	300 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.005 x 150 x 14 mm
<b>Type of fastener device:</b>	Velcro
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 1 mm <sup>2</sup> H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 50-60 L drums

**BFV1250150350:** Drum-heaters for 50 - 60 litres drums

- Suitable for metal drums and drums made of fiberglass, polyester, polyethylene, etc.

**BFV 50 - 60 L**



Model	50-60 Litres
Reference	BFV1250150350
Length	1.250 mm (Drum perimeter 1100 / 1250 mm)
Width	150 mm
Power (W)	350 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon straps with plastic buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat

**AT056**



Model	Description
<b>AT056</b>	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz</li> <li>• Maximum load current: 3 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Bulb and capillary sensing - 1 metre</li> </ul>

## Technical characteristics

<b>Model:</b>	<b>BFV1250150350</b>
<b>Application areas:</b>	Heating and temperature control for drums of 50-60 L
<b>Power delivery at 230 V - 50 Hz:</b>	350 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
Fire resistance: IMO Res. MSC.61(67) FTP - Cod	
<b>Approximate dimensions:</b>	1.250 x 150 x 14 mm
<b>Type of fastener device:</b>	Nylon straps with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 1 mm <sup>2</sup> H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 50-60 L drums

**BFV1250450275:** Drum-heaters for 50 - 60 litres drums

- Suitable for metal drums and drums made of fiberglass, polyester, polyethylene, etc.

**BFV 50 - 60 L**



Model	50-60 Litres
Reference	BFV1250450275
Length	1.250 mm (Drum perimeter 1100 / 1250 mm)
Width	450 mm
Power (W)	275 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon belts with plastic buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat

**AT056**



Model	Description
AT056	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz</li> <li>• Maximum load current: 3 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Built-in the heater</li> </ul>



## Technical characteristics

<b>Model:</b>	<b>BFV1250450275</b>
<b>Application areas:</b>	Heating and temperature control for drums of 50-60 L
<b>Power delivery at 230 V - 50 Hz:</b>	275 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
Fire resistance: IMO Res. MSC.61(67) FTP - Cod	
<b>Approximate dimensions:</b>	1.250 x 450 x 14 mm
<b>Type of fastener device:</b>	Nylon belts with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 1 mm <sup>2</sup> H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 50-60 L drums

**BFV1250450625:** Drum-heaters for 50 - 60 litres drums

- Suitable for metal drums.

**BFV 50 - 60 L**



Model	50-60 Litres
Reference	BFV1250450625
Length	1.250 mm (Drum perimeter 1100 / 1250 mm)
Width	450 mm
Power (W)	625 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon belts with plastic buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat

**AT056**



Model	Description
AT056	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz</li> <li>• Maximum load current: 3 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Built-in the heater</li> </ul>

## Technical characteristics

<b>Model:</b>	<b>BFV1250450625</b>
<b>Application areas:</b>	Heating and temperature control for drums of 50-60 L
<b>Power delivery at 230 V - 50 Hz:</b>	625 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.250 x 450 x 14 mm
<b>Type of fastener device:</b>	Nylon belts with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 1 mm <sup>2</sup> H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 100 L drums

**BFV1385150750:** Drum-heaters for 100 litres drums

- Suitable for metal drums and drums made of fiberglass, polyester, polyethylene, etc.

**BFV 100 L**



Model	100 Litres
Reference	BFV1385150750
Length	1.385 mm
Width	150 mm
Power (W)	750 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Velcro

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat

**AT056**



Model	Description
<b>AT056</b>	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz</li> <li>• Maximum load current: 5 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Bulb and capillary sensing - 1 metre</li> </ul>

## Technical characteristics

<b>Model:</b>	<b>BFV1385150750</b>
<b>Application areas:</b>	Heating and temperature control for drums of 100 L
<b>Power delivery at 230 V - 50 Hz:</b>	750 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.385 x 150 x 14 mm
<b>Type of fastener device:</b>	Velcro
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 1,5 mm² H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 100 L drums

**BFV1650350575:** Drum-heaters for 100 litres drums

- Suitable for metal drums and drums made of fiberglass, polyester, polyethylene, etc.

**BFV 100 L**



Model	100 Litres
Reference	BFV1650350575
Length	1.650 mm (Drum perimeter 1500 / 1650 mm)
Width	350 mm
Power (W)	575 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon belts with plastic buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat

**AT056**



Model	Description
AT056	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz</li> <li>• Maximum load current: 5 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Built-in the heater</li> </ul>

## Technical characteristics

<b>Model:</b>	<b>BFV1650350575</b>
<b>Application areas:</b>	Heating and temperature control for drums of 100 L
<b>Power delivery at 230 V - 50 Hz:</b>	575 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.650 x 350 x 14 mm
<b>Type of fastener device:</b>	Nylon belts with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 1 mm <sup>2</sup> H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 100 L drums

**BFV1650350750:** Drum-heaters for 100 litres drums

- Suitable for metal drums.

**BFV 100 L**



Model	100 Litres
Reference	BFV165035075
Length	1.650 mm (Drum perimeter 1500 / 1650 mm)
Width	350 mm
Power (W)	750 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon belts with plastic buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat

**AT056**



Model	Description
AT056	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz.</li> <li>• Maximum load current: 5 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Built-in the heater</li> </ul>



## Technical characteristics

<b>Model:</b>	<b>BFV1650350750</b>
<b>Application areas:</b>	Heating and temperature control for drums of 100 L
<b>Power delivery at 230 V - 50 Hz:</b>	750 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.650 x 350 x 14 mm
<b>Type of fastener device:</b>	Nylon belts with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 1 mm <sup>2</sup> H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 200 L drums

**BFV17704501000:** Drum-heaters for 200 litres drums

- Suitable for metal drums and drums made of fiberglass, polyester, polyethylene, etc.

**BFV 200 L**



Model	200 Litres
Reference	BFV17704501000
Length	1.770 mm
Width	450 mm
Power (W)	1.000 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon belts with plastick buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat

**AT056**



Model	Description
AT056	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz.</li> <li>• Maximum load current: 5 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Built-in the heater</li> </ul>

## Technical characteristics

<b>Model:</b>	<b>BFV17704501000</b>
<b>Application areas:</b>	Heating and temperature control for drums of 200 L
<b>Power delivery at 230 V - 50 Hz:</b>	1.000 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.770 x 450 x 14 mm
<b>Type of fastener device:</b>	Nylon belts with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 2,5 mm² H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 200 L drums

**BFV19504501000:** Drum-heaters for 200 litres drums

- Suitable for metal drums and drums made of fiberglass, polyester, polyethylene, etc.

**BFV 200 L**



Model	200 Litres
Reference	BFV19504501000
Length	1.950 mm
Width	450 mm
Power (W)	1.000 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon belts with plastick buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Adjustable analog thermostat

**AT056**



Model	Description
<b>AT056</b>	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz.</li> <li>• Maximum load current: 5 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Built-in the heater</li> </ul>

## Technical characteristics

<b>Model:</b>	<b>BFV19504501000</b>
<b>Application areas:</b>	Drum heater for drums and cans of 200 litres
<b>Power delivery at 230 V - 50 Hz:</b>	1.000 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.950 x 450 x 14 mm
<b>Type of fastener device:</b>	Nylon belts with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 2,5 mm <sup>2</sup> H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 200 L drums

**BFV1950850900:** Drum-heaters for 200 litres drums

- Suitable for metal drums and drums made of fiberglass, polyester, polyethylene, etc.

**BFV 200 L**



Model	200 Litres
Reference	BFV1950850900
Length	1.950 mm (for drums of 1.800/1.950 mm)
Width	850 mm
Power (W)	900 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon belts with plastic buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Adjustable analog thermostat

**AT056**



Model	Description
AT056	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz.</li> <li>• Maximum load current: 5 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Built-in the heater</li> </ul>

## Technical characteristics

<b>Model:</b>	<b>BFV1950850900</b>
<b>Application areas:</b>	Drum heater for drums and cans of 200 litres
<b>Power delivery at 230 V - 50 Hz:</b>	900 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.950 x 850 x 14 mm
<b>Type of fastener device:</b>	Nylon belts with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 2,5 mm <sup>2</sup> H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 200 L drums

**BFV19508501500:** Drum-heaters for 200 litres drums

- Suitable for metal drums and drums made of fiberglass, polyester, polyethylene, etc.

**BFV 200 L**



Model	200 Litres
Reference	BFV19508501500
Length	1.950 mm (for drums of 1.800/1.950 mm)
Width	850 mm
Power (W)	1.500 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon belts with plastic buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Adjustable analog thermostat

**AT056**



Model	Description
AT056	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz</li> <li>• Maximum load current: 7 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Built-in the heater</li> </ul>



## Technical characteristics

<b>Model:</b>	<b>BFV19508501500</b>
<b>Application areas:</b>	Drum heater for drums and cans of 200 litres
<b>Power delivery at 230 V - 50 Hz:</b>	1.500 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.950 x 850 x 14 mm
<b>Type of fastener device:</b>	Nylon belts with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 2,5 mm <sup>2</sup> H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 200 L drums

**BFV19508502300:** Drum-heaters for 200 litres drums

- Suitable for metal drums and drums made of fiberglass, polyester, polyethylene, etc.

**BFV 200 L**



Model	200 Litres
Reference	BFV19508502300
Length	1.950 mm (for drums of 1.800/1.950 mm)
Width	850 mm
Power (W)	2.300 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon belts with plastic buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat

**AT056**



Model	Description
AT056	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz.</li> <li>• Maximum load current: 12 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Built-in the heater</li> </ul>

## Technical characteristics

<b>Model:</b>	<b>BFV19508502300</b>
<b>Application areas:</b>	Heating and temperature control for drums of 200 L
<b>Power delivery at 230 V - 50 Hz:</b>	2.300 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.950 x 850 x 14 mm
<b>Type of fastener device:</b>	Nylon belts with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 2,5 mm² H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Drum-heaters for 200 L drums

**BFV17709001500:** Drum-heaters for 200 litres drums

- Suitable for metal drums and drums made of fiberglass, polyester, polyethylene, etc.

**BFV 200 L**



Model	200 Litres
Reference	BFV17709001500
Length	1.770 mm
Width	900 mm
Power (W)	1.500 W
Voltage (V)	230 V - 50 Hz
Temp. range	0 - 90° C
Fastening device	Nylon belts with plastick buckles

**Important:** The entire **BFV** range of drum-heaters includes a thermostat, as well as a second safety device (safety micro-thermostat), with a tolerance of  $\pm 5^\circ \text{C}$ .

This heating blanket can reach a temperature of  $90^\circ \text{C}$ , with a hysteresis:  $30 \text{ K} \pm 15 \text{ K}$

**AT056:** Analog adjustable thermostat

**AT056**



Model	Description
AT056	<ul style="list-style-type: none"> <li>• Analog thermostat</li> <li>• Temp. range: <math>-10/90^\circ \text{C}</math></li> <li>• Voltage: 230 V - 50 Hz.</li> <li>• Maximum load current: 7 A</li> <li>• On/Off differential: <math>4^\circ \text{C}</math></li> <li>• Sensor: Built-in the heater</li> </ul>

## Technical characteristics

<b>Model:</b>	<b>BFV17709001500</b>
<b>Application areas:</b>	Heating and temperature control for drums of 200 L
<b>Power delivery at 230 V - 50 Hz:</b>	1.500 W
<b>Maximum working temperature:</b>	90° C ± 5° C
<b>Minimum working temperature:</b>	- 40° C ± 5° C
<b>Heating conductor:</b>	Ni/Cr 80/20
<b>Conductor insulation:</b>	Thermal silicone double insulation
<b>Maximum working temp. of the conductor:</b>	- 40 / 180° C
<b>Heating blanket insulation:</b>	Siliconed fiberglass fabric
	100% Textured filament fiberglass
	Treatment: One side silicone translucent
	Weft: EC-9-136 Tex * 1
	Warp: EC-9-136 Tex * 1
	Tensile strength
	Weft: 5000N/5 cm
	Warp: 3000N/5 cm
	Total thickness of the heating blanket: 14 mm
	Fabric: Cross Twill
	Fire resistance: IMO Res. MSC.61(67) FTP - Cod
<b>Approximate dimensions:</b>	1.770 x 900 x 14 mm
<b>Type of fastener device:</b>	Nylon belts with plastic buckles
<b>Dielectric strength:</b>	1.500 V 1 min. ≥ 50GΩ
<b>Power cable:</b>	Conductor 3 x 2,5 mm² H07RN-F
<b>Standards:</b>	2014 / 35 / UE
	2014 / 30 / UE
	EN60335-1
	EN ISO 12100-1 & 2
<b>Safety thermostat:</b>	Internal micro-thermostat 91° C (+ 5° C - 15K)
<b>Thermostat:</b>	AT056: -10 / 90° C   ±4° C   16A   230 V - 50 Hz   Acerinox bulb and capillary sensing



## Heating blankets request

### Request form

If you don't find a heater that fulfills your needs, please feel free to suggest any modification as measures, power output, voltage, etc.:

- Email: [as@elementoscalefactores.com](mailto:as@elementoscalefactores.com)
- Fax: 00 34 93 486 38 14

### Contact data


Name | Last name: ..... Company:.....  
 Telephone:..... Email:.....  
 Address:..... PC: .....  
 City: ..... Country: .....

### Project details

Location (city):.....  
 Inner, outer, both: .....

### Characteristics of the container

Height (mm): .....  
 Perimeter (mm): .....  
 Estimated power: .....  
 Constitution of the drum or tank (metal, plastic, etc.):.....  
 Units needed: .....

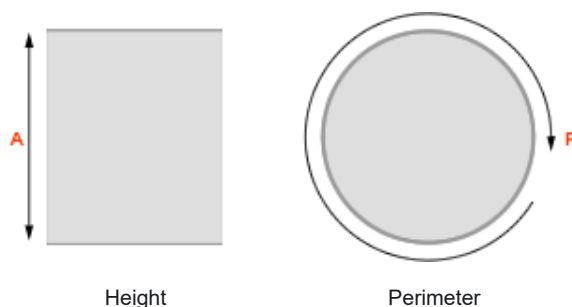

### Product features

Kind of product: .....  
 Room temperature: .....  
 Temperature to achieve: .....

### Type of fastener

Velcro: .....  
 Nylon straps with plastic buckles: .....  
 Springs: .....  
 Other (specify):.....



### Temperature and control device

AT056: Analogue thermostat -10/90° C.....  
 DP16A: Digital programmable thermostat -20 a +140 ° C .....  
 Other: ..... Specify:.....

## Our other heating blankets



**BFV-IBC:** Heating blankets for IBC tanks of 1.000 L.  
Learn more: <https://www.elementoscalefactores.com/aplicaciones-en/ibc-tank-heaters.htm>



**BFV-EM:** Heating bands for electric motors.  
Learn more: <https://www.elementoscalefactores.com/aplicaciones-es/calentadores-motores.htm>



**BFV-AT:** Heating blankets for High Voltage cables.  
Learn more: <https://www.elementoscalefactores.com/aplicaciones-en/heating-blanket-HV-cables.htm>



**BFV-CC:** Heating blankets for curing.  
Learn more: <https://www.elementoscalefactores.com/aplicaciones-en/heating-blankets-curing.htm>

# ELEMENTOS CALEFACTORES AS, S.L

C/ Zamora, 99 - 101, 5º planta 1ª  
08018 Barcelona  
Tel. 00 34 93 486 36 82 - Fax 00 34 93 486 38 14  
Email: [as@elementoscalefactores.com](mailto:as@elementoscalefactores.com)



## ECAS GROUP

- **Main website** •

[www.elementoscalefactores.com](http://www.elementoscalefactores.com)

- **Online store** •

[www.electriceatingstore.com](http://www.electriceatingstore.com)

